


EasyStick™ Gutter / Gravel Stop Detail

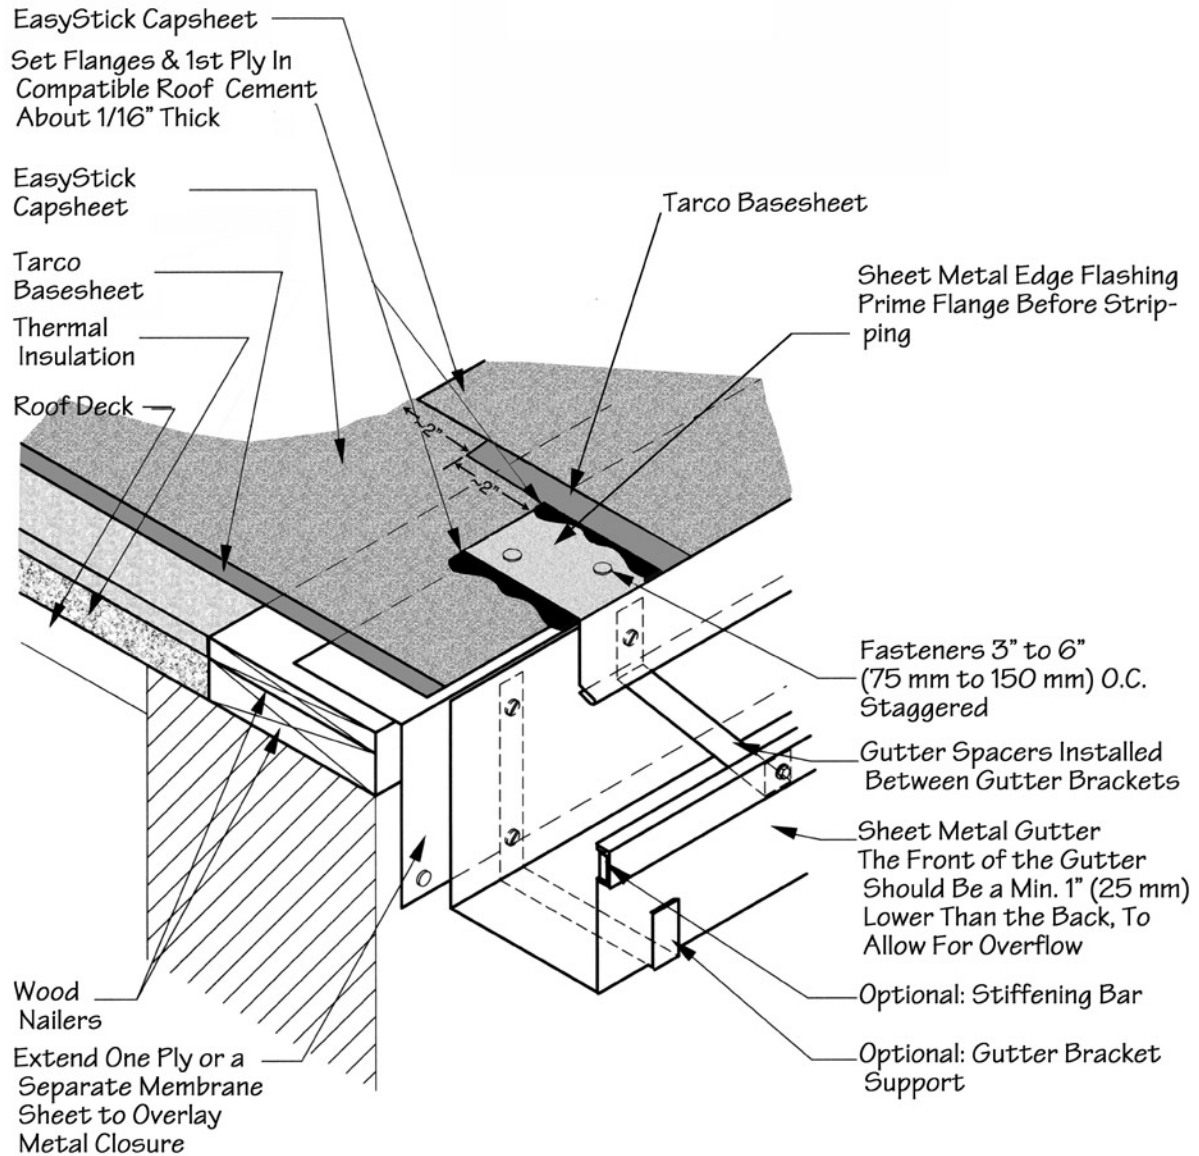

Notes:

1. For a gravel stop detail, replace the sheet metal edge flashing and gutter with a gravel stop. Use a continuous cleat in the drip edge, one gauge heavier, to secure the lower edge of the gravel stop. Tapered insulation at the edge of the roof is recommended to raise the gravel stop out of the plane of the roof.
2. In cold climates where temperatures remain below freezing for extended periods of time, an interior drain is recommended.
3. Use industry recommendations (SMACNA & NRCA) for the metal thickness, attachment, etc.