





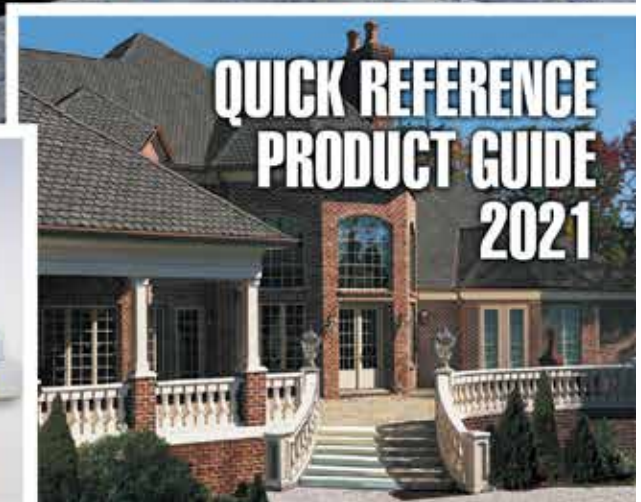

# Tarco

*Underlayments are our business<sup>®</sup>*

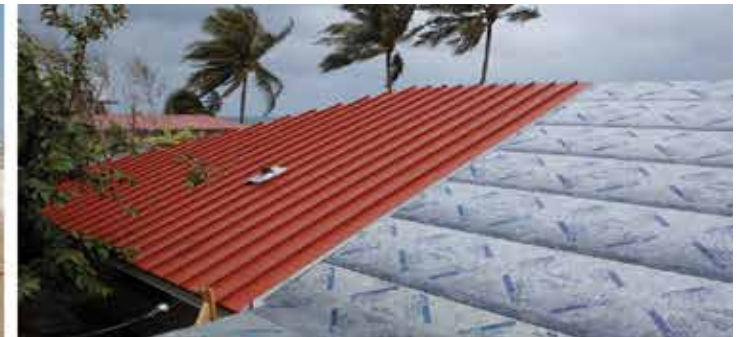



**LeakBARRIER<sup>®</sup>**


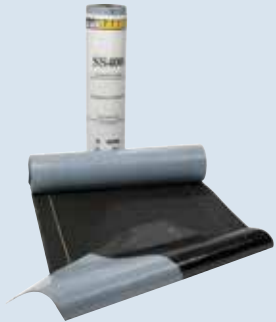

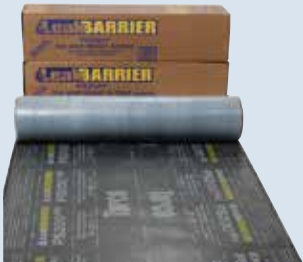
# Roll Roofing

Product	Description	Product Data	Usage	Application
	<p><b>Asphalt Saturated Organic Felt</b></p> <p>Premium quality organic mat saturated with high-grade asphalt.</p> <p><a href="#">Asphalt Saturated Organic Felt Data Sheet</a></p>		<p>Use under shingles, cedar shakes and mechanically attached tiles.</p>	<p>Mechanical</p>
	<p><b>Asphalt Saturated Base Sheets</b></p> <p>Premium quality organic mat saturated with high-grade asphalt, lightly coated with a mineral release material.</p> <p><a href="#">Asphalt Saturated Base Sheets Data Sheet</a></p>		<p>Use as underlayment, eave and valley flashing, and vapor barrier in low slope commercial and residential installations.</p>	<p>Mechanical</p>
	<p><b>Asphalt Organic Tile Underlayment</b></p> <p>Premium quality organic mat saturated with high-grade asphalt, coated with high-grade weathering asphalt, surfaced with mineral granules.</p> <p><a href="#">Asphalt Organic Tile Underlayment Data Sheet</a></p>	<p><b>Width</b> 36 in  <b>Length</b> 36 ft  <b>Gross Coverage</b> 1 square  <b>Weight</b> 83 lb (nominal)</p>	<p>Use under foam and mechanically attached tiles.</p>	<p>Hot mopped or cold process adhesive</p>
	<p><b>Fiberglass Mineral Surface Roll Roofing (90#)</b></p> <p>Fiberglass reinforced asphalt coated underlayment with a ceramic granular surface to protect against UV, weathering and physical damage.</p> <p><a href="#">Fiberglass Mineral Surface Roll Roofing Data Sheet</a></p>	<p><b>Width</b> 36 in  <b>Length</b> 36 ft  <b>Gross Coverage</b> 108 sq ft  <b>Weight</b> 72 lb (nominal)</p>	<p>Good for both low and steep slope applications.</p>	<p>Hot-mopped or cold process adhesives</p>

# Synthetic Underlayments

Product	Description	Product Data	Usage	Application
 <p><b>EasyLay UDL 15</b></p> <p><a href="#">EasyLay UDL 15 Data Sheet</a></p>	<p>Value-priced synthetic roof underlayment with good weather resistance. Woven polymeric scrim imparts strength, while textured fabric surface provides walkability.</p>	<p><b>Width</b> 48 in (1.22 m)  <b>Length</b> 250 ft (76.2 m)  <b>Thickness</b> 8 mil (<i>nominal</i>)  <b>Gross Coverage</b> 1,000 sq ft (10 sq)  <b>Weight</b> 22 lb (<i>nominal</i>)</p>	<p>Designed as an alternative to 15# asphalt saturated felt, good for new and re-roofing applications.</p>	<p>Mechanical</p>
 <p><b>EasyLay UDL Basic</b></p> <p><a href="#">EasyLay UDL Basic Data Sheet</a></p>	<p>Polyolefin-based synthetic underlayment with excellent weather resistance that has textured fabric on the topside that provides good traction for the installer.</p>	<p><b>Width</b> 4 ft (1.219 m)  <b>Length</b> 250 ft (76.2 m)  <b>Thickness</b> 10 mil (<i>nominal</i>)  <b>Gross Coverage</b> 1,000 sq ft (10 sq)  <b>Weight</b> 32 lb (<i>nominal</i>)</p>	<p>Use under shingles, cedar shakes, mechanically attached tiles. Good for both low and steep slope applications and as a valley liner.</p>	<p>Mechanical</p>

# Self-Adhesive Underlayments

Product	Description	Product Data	Usage	Application
 <p><b>MS300</b> <a href="#">MS300 Data Sheet</a></p>	<p>Fiberglass reinforced, self-adhesive modified bituminous roofing underlayment with mineral granules on the surface for enhanced skid resistance.</p>	<p><b>1 Square</b>    <b>2 Square</b></p> <p><b>Width</b>      36 in      36 in</p> <p><b>Length</b>      33 ft      66 ft</p> <p><b>Weight</b>      30 lb (nominal) 60 lb (nominal)</p> <p><b>Thickness</b> 56 mil (nominal) 56 mil (nominal)</p>	<p>Use under shingles, cedar shakes, mechanically attached tiles. Good for steep slope applications and as a valley liner.</p>	<p>Self-adhered</p>
 <p><b>SS400</b> <a href="#">SS400 Data Sheet</a></p>	<p>Modified bituminous roofing underlayment reinforced with a heavyweight fiberglass mat. Glass fiber reinforcement on the upper surface for enhanced skid resistance.</p>	<p><b>Width</b>      36 in</p> <p><b>Length</b>      66 ft</p> <p><b>Thickness</b>    48 mil (nominal)</p> <p><b>Gross Coverage</b> 2 squares</p> <p><b>Weight</b>      50 lb (nominal)</p>	<p>Use under shingles, cedar shakes, mechanically attached tiles. Good for steep slope applications and as a valley liner.</p>	<p>Self-adhered</p>
 <p><b>PS200<sup>HT</sup></b> <a href="#">PS200<sup>HT</sup> Data Sheet</a></p>	<p>Premium SBS modified glass fiber reinforced, self-adhesive modified bituminous roofing underlayment manufactured with a specially engineered Hybrid Polymer System formulation that allows it to withstand high temperatures.</p>	<p><b>Width</b>      36 in</p> <p><b>Length</b>      66 ft 8 in</p> <p><b>Thickness</b>    60 mil (nominal)</p> <p><b>Gross Coverage</b> 2 squares</p> <p><b>Weight</b>      55 lb (nominal)</p>	<p>Use under shingles, cedar shakes, tiles (foam and mechanical installation), all metal roofs. Good for steep slope applications.</p>	<p>Self-adhered</p>
 <p><b>PS200<sup>MU</sup></b> <a href="#">PS200<sup>MU</sup> Data Sheet</a></p>	<p>Self-adhesive, glass fiber reinforced modified bituminous roofing underlayment with polyolefinic film on the upper side for good walkability. For use in high temperature environments.</p>	<p><b>Width</b>      36 in</p> <p><b>Length</b>      66 ft 8 in</p> <p><b>Thickness</b>    48 mil (nominal)</p> <p><b>Gross Coverage</b> 2 squares</p> <p><b>Weight</b>      50 lb (nominal)</p>	<p>Use under shingles, cedar shakes, mechanically attached tiles, metal (excluding copper and zinc). Good for steep slope applications.</p>	<p>Self-adhered</p>

## Product



## SA Shingle Starter

[Shingle Starter Data Sheet](#)

## Description

Fiberglass reinforced asphalt coated shingle starter roll surfaced with ceramic granules to protect against UV, weathering and physical damage.

## Product Data

**Roll Dimensions** 7 ft x 33.4 in  
**Coverage** 33.4 ft<sup>2</sup>  
**Weight** 7.5 lb

## Usage




Use under shingles and cedar shakes  
For steep slope applications.

## Application

Self-adhered



# Base Sheets

Product	Description	Product Data	Usage	Application
	<p><b>Glass Base</b></p> <p><a href="#">Glass Base Data Sheet</a></p> <p>Fiberglass reinforced sheet coated with superior quality weathering-grade asphalt.</p>	<p><b>Width</b> 36 in</p> <p><b>Length</b> 108 ft</p> <p><b>Gross Coverage</b> 300 sq ft</p> <p><b>Weight</b> 72 lb (<i>nominal</i>)</p>	<p>Use as the initial or base ply in built-up and modified bitumen roof systems. Good for both low and steep slope applications.</p>	<p>Mechanical, hot-mopped or cold process adhesives</p>
	<p><b>EasyNailBase</b></p> <p><a href="#">EasyNailBase Data Sheet</a></p> <p>SBS modified bituminous membrane reinforced with fiberglass mat with polyolefinic film on the top surface and sand on the bottom side, for use as a mechanically attached base sheet in self-adhering roofing systems as well as torch, hot mop and cold applied systems.</p>	<p><b>Width</b> 36 in</p> <p><b>Length</b> 72 ft</p> <p><b>Thickness</b> 50 mil (<i>nominal</i>)</p> <p><b>Gross Coverage</b> 216 sq ft</p> <p><b>Weight</b> 60 lb (<i>nominal</i>)</p>	<p>Good for both low and steep slope applications.</p>	<p>Mechanical</p>
	<p><b>EasyBase</b></p> <p><a href="#">EasyBase Data Sheet</a></p> <p>SBS modified, glass fiber reinforced, self-adhesive modified bituminous base sheet with a UV resistant polyolefinic film surface.</p>	<p><b>Width</b> 36 in</p> <p><b>Length</b> 72 ft</p> <p><b>Thickness</b> 54 mil (<i>nominal</i>)</p> <p><b>Gross Coverage</b> 216 sq ft</p> <p><b>Weight</b> 70 lb (<i>nominal</i>)</p>	<p>Good for both low and steep slope applications.</p>	<p>Self-adhered</p>

Product	Description	Product Data	Usage	Application
---------	-------------	--------------	-------	-------------



### Valley Flash

[Valley Flash Data Sheet](#)

Fiberglass reinforced sheet sandwiched between two layers of a heavy coating of superior quality bituminous resins modified with synthetic resins.

**Width** 36 in  
**Length** 33 ft 4 in  
**Coverage** 1 square  
**Weight** 33 lb (*nominal*)

Use as valley liner under shingles, cedar shakes.

Mechanical



### SBS Multipurpose Underlayment

[SBS Multipurpose Underlayment Data Sheet](#)

Fiberglass reinforced sheet sandwiched between two layers of superior quality polymer modified bitumen.

**Width** 36 in  
**Length** 66 ft 8 in  
**Thickness** 40 mil (*nominal*)  
**Gross Coverage** 2 squares  
**Weight** 64 lb (*nominal*)

Use as a base sheet/ply sheet in modified bitumen, asphalt built-up and cold process roofing systems. Good for both low and steep slope applications and as a valley liner.

Mechanical



### EasyTorch SA Base

[EasyTorch SA Base](#)



Smooth surfaced, glass fiber reinforced, modified bituminous roofing membrane for use as a base sheet.

**Width** 36 in  
**Length** 72 ft  
**Thickness** 50 mil (*nominal*)  
**Gross Coverage** 216 sq ft  
**Weight** 70 lb (*nominal*)


Good for both low and steep slope applications.

Self-adhered

# Self-Adhesive SBS Modified Bitumen Membrane

Product	Description	Product Data	Usage	Application
 <p><b>EasyStick Plus</b></p> <p><a href="#">EasyStick Plus Data Sheet</a></p>	SBS modified, granule surfaced, polyester reinforced self-adhesive modified bituminous cap sheet.	<p><b>Width</b> 36 in</p> <p><b>Length</b> 36 ft</p> <p><b>Thickness</b> 120 mil (<i>nominal</i>)</p> <p><b>Gross Coverage</b> 108 sq ft</p> <p><b>Weight</b> 80 lb (<i>nominal</i>)</p>	Good for both low and steep slope applications.	Self-adhered
 <p><b>ReflectPlus</b></p> <p><a href="#">ReflectPlus Data Sheet</a></p>	SBS modified bituminous membrane with a highly reflective film laminate on the upper side and a removable silicone treated release liner on the bottom adhesive side. The exposed surface is comprised of a proprietary construction of a bright white acrylic coated aluminum reinforced with a polyolefinic film that provides enhanced reflectivity and emissivity.	<p><b>Width</b> 36 in</p> <p><b>Length</b> 33 ft 4 in</p> <p><b>Thickness</b> 40 mil (<i>nominal</i>)</p> <p><b>Gross Coverage</b> 100 sq ft</p> <p><b>Weight</b> 28 lb (<i>nominal</i>)</p>	Good for low slope applications. Designed for use as a finished roof covering in multi-ply roof systems, including new roofing, re-roofing and recover applications. ReflectPlus is ideal for patching and gutter repair, and for use as a flashing membrane.	Self-adhered

## Below Grade Waterproofing

Product	Description	Product Data	Usage	Application
 <p><b>BG700</b></p> <p><a href="#">BG700 Data Sheet</a></p>	Self-adhering SBS modified bituminous membrane with a high strength cross laminated polyethylene film on the upper side and a removable silicone treated release liner on the bottom adhesive side. The versatile membrane can be installed to a variety of substrates in residential and selected light commercial and industrial applications.	<p><b>Width</b> 36 in</p> <p><b>Length</b> 66 ft 8 in</p> <p><b>Thickness</b> 60 mil (<i>nominal</i>)</p> <p><b>Gross Coverage</b> 200 sq ft</p> <p><b>Weight</b> 73 lb (<i>nominal</i>)</p>	Multi-purpose membrane for vertical and horizontal waterproofing of foundation walls, tunnels, and earth shelters, as well as plaza decks, parking decks, balconies and terraces. Good for interior applications such as bathrooms and kitchens, and under siding, exterior plaster, wall flashing or anywhere it will be protected from prolonged exposure to ultraviolet light.	Self-adhered

# Tarco

One Information Way, Suite 225 ♦ Little Rock, AR 72202  
 Voice: 501-945-4506 ♦ 800-365-4506 ♦ Fax: 501-945-7718 ♦ [www.tarcoroofing.com](http://www.tarcoroofing.com)

