





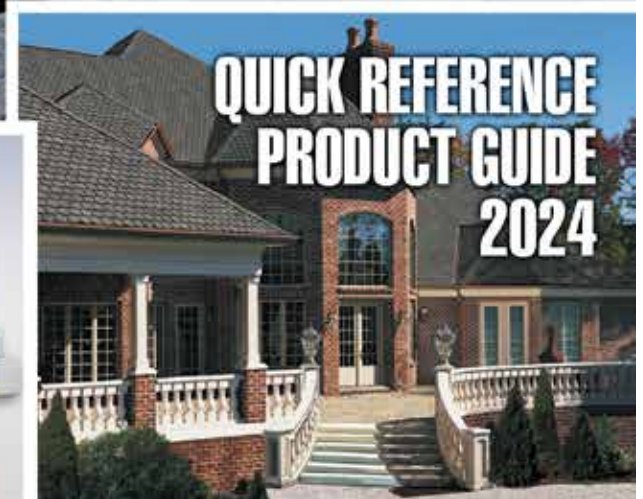

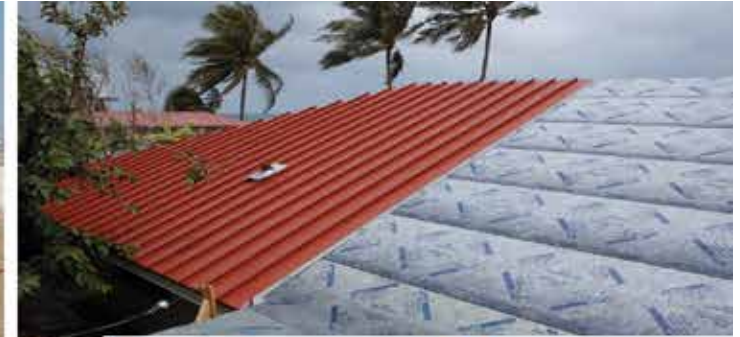



# Tarco®

*Underlayments are our business®*





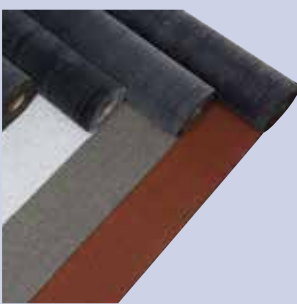

## LeakBARRIER®







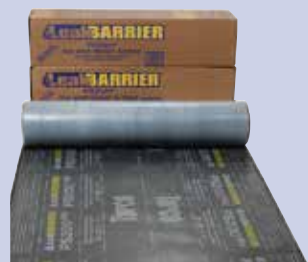

# Roll Roofing

| Product   | Description   | Product Data  | Usage  | Application  |
|---|---|---|--|--|
|    | <p><b>Asphalt Saturated Organic Felt</b></p> <p>Premium quality organic mat saturated with high-grade asphalt.</p> <p><a href="#">Asphalt Saturated Organic Felt Data Sheet</a></p>    |   |  | <p>Use under shingles, cedar shakes and mechanically attached tiles.</p> <p>Mechanical</p>   |
|    | <p><b>Asphalt Saturated Base Sheets</b></p> <p>Premium quality organic mat saturated with high-grade asphalt, lightly coated with a mineral release material.</p> <p><a href="#">Asphalt Saturated Base Sheets Data Sheet</a></p>    |   |  | <p>Use as underlayment, eave and valley flashing, and vapor barrier in low slope commercial and residential installations.</p> <p>Mechanical</p> |
|   | <p><b>Asphalt Organic Tile Underlayment</b></p> <p>Premium quality organic mat saturated with high-grade asphalt, coated with high-grade weathering asphalt, surfaced with mineral granules.</p> <p><a href="#">Asphalt Organic Tile Underlayment Data Sheet</a></p>                   | <p><b>Width</b> 36 in<br/> <b>Length</b> 36 ft<br/> <b>Gross Coverage</b> 1 square<br/> <b>Weight</b> 83 lb (<i>nominal</i>)</p>  | <p>Use under foam and mechanically attached tiles.</p> | <p>Hot mopped or cold process adhesive</p>   |
|  | <p><b>Fiberglass Mineral Surface Roll Roofing (90#)</b></p> <p>Fiberglass reinforced asphalt coated underlayment with a ceramic granular surface to protect against UV, weathering and physical damage.</p> <p><a href="#">Fiberglass Mineral Surface Roll Roofing Data Sheet</a></p>  | <p><b>Width</b> 36 in<br/> <b>Length</b> 36 ft<br/> <b>Gross Coverage</b> 108 sq ft<br/> <b>Weight</b> 72 lb (<i>nominal</i>)</p> | <p>Good for both low and steep slope applications.</p> | <p>Hot-mopped or cold process adhesives</p>  |

# Synthetic Underlayments

| Product   | Description   | Product Data   | Usage   | Application       |
|---|---|--|---|-------------------|
|  <p><b>EasyLay UDL 15</b><br/> <a href="#">EasyLay UDL 15 Data Sheet</a></p>        | <p>Value-priced synthetic roof underlayment with good weather resistance. Woven polymeric scrim imparts strength, while textured fabric surface provides walkability.</p> | <p><b>Width</b> 48 in (1.22 m)<br/> <b>Length</b> 250 ft (76.2 m)<br/> <b>Thickness</b> 8 mil (<i>nominal</i>)<br/> <b>Gross Coverage</b> 1,000 sq ft (10 sq)<br/> <b>Weight</b> 22 lb (<i>nominal</i>)</p>  | <p>Designed as an alternative to 15# asphalt saturated felt, good for new and re-roofing applications.</p>                                  | <p>Mechanical</p> |
|  <p><b>EasyLay UDL Basic</b><br/> <a href="#">EasyLay UDL Basic Data Sheet</a></p>  | <p>Polyolefin-based synthetic underlayment with excellent weather resistance that has textured fabric on the topside that provides good traction for the installer.</p>   | <p><b>Width</b> 4 ft (1.219 m)<br/> <b>Length</b> 250 ft (76.2 m)<br/> <b>Thickness</b> 10 mil (<i>nominal</i>)<br/> <b>Gross Coverage</b> 1,000 sq ft (10 sq)<br/> <b>Weight</b> 32 lb (<i>nominal</i>)</p> | <p>Use under shingles, cedar shakes, mechanically attached tiles. Good for both low and steep slope applications and as a valley liner.</p> | <p>Mechanical</p> |
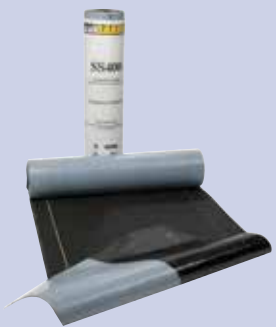
# Self-Adhesive Underlayments

| Product  | Description  | Product Data   | Usage        | Application |               |              |                  |                           |                       |           |               |                          |  |                          |                  |                           |                           |  |                     |
|--|--|--|--------------|-------------|---------------|--------------|------------------|---------------------------|-----------------------|-----------|---------------|--------------------------|--|--------------------------|------------------|---------------------------|---------------------------|--|---------------------|
|  <p><b>MS300</b><br/><a href="#">MS300 Data Sheet</a></p>                                | <p>Fiberglass reinforced, self-adhesive modified bituminous roofing underlayment with mineral granules on the surface for enhanced skid resistance.</p>  | <table border="1"> <thead> <tr> <th></th> <th>1 Square</th> <th>2 Square</th> </tr> </thead> <tbody> <tr> <td><b>Width</b></td> <td>36 in</td> <td>36 in</td> </tr> <tr> <td><b>Length</b></td> <td>33 ft</td> <td>66 ft</td> </tr> <tr> <td><b>Weight</b></td> <td>30 lb (<i>nominal</i>)</td> <td>60 lb (<i>nominal</i>)</td> </tr> <tr> <td><b>Thickness</b></td> <td>56 mil (<i>nominal</i>)</td> <td>56 mil (<i>nominal</i>)</td> </tr> </tbody> </table> |              | 1 Square    | 2 Square      | <b>Width</b> | 36 in            | 36 in                     | <b>Length</b>         | 33 ft     | 66 ft         | <b>Weight</b>            | 30 lb ( <i>nominal</i> )   | 60 lb ( <i>nominal</i> ) | <b>Thickness</b> | 56 mil ( <i>nominal</i> ) | 56 mil ( <i>nominal</i> ) | <p>Use under shingles, cedar shakes, mechanically attached tiles. Good for steep slope applications and as a valley liner.</p> | <p>Self-adhered</p> |
|  | 1 Square   | 2 Square   |              |             |               |              |                  |                           |                       |           |               |                          |  |                          |                  |                           |                           |  |                     |
| <b>Width</b>   | 36 in  | 36 in  |              |             |               |              |                  |                           |                       |           |               |                          |  |                          |                  |                           |                           |  |                     |
| <b>Length</b>  | 33 ft  | 66 ft  |              |             |               |              |                  |                           |                       |           |               |                          |  |                          |                  |                           |                           |  |                     |
| <b>Weight</b>  | 30 lb ( <i>nominal</i> )   | 60 lb ( <i>nominal</i> )   |              |             |               |              |                  |                           |                       |           |               |                          |  |                          |                  |                           |                           |  |                     |
| <b>Thickness</b>   | 56 mil ( <i>nominal</i> )  | 56 mil ( <i>nominal</i> )  |              |             |               |              |                  |                           |                       |           |               |                          |  |                          |                  |                           |                           |  |                     |
|  <p><b>SS400</b><br/><a href="#">SS400 Data Sheet</a></p>                                | <p>Modified bituminous roofing underlayment reinforced with a heavyweight fiberglass mat. Glass fiber reinforcement on the upper surface for enhanced skid resistance.</p>   | <table border="1"> <tbody> <tr> <td><b>Width</b></td> <td>36 in</td> </tr> <tr> <td><b>Length</b></td> <td>66 ft</td> </tr> <tr> <td><b>Thickness</b></td> <td>48 mil (<i>nominal</i>)</td> </tr> <tr> <td><b>Gross Coverage</b></td> <td>2 squares</td> </tr> <tr> <td><b>Weight</b></td> <td>50 lb (<i>nominal</i>)</td> </tr> </tbody> </table>   | <b>Width</b> | 36 in       | <b>Length</b> | 66 ft        | <b>Thickness</b> | 48 mil ( <i>nominal</i> ) | <b>Gross Coverage</b> | 2 squares | <b>Weight</b> | 50 lb ( <i>nominal</i> ) | <p>Use under shingles, cedar shakes, mechanically attached tiles. Good for steep slope applications and as a valley liner.</p>   | <p>Self-adhered</p>      |                  |                           |                           |  |                     |
| <b>Width</b>   | 36 in  |  |              |             |               |              |                  |                           |                       |           |               |                          |  |                          |                  |                           |                           |  |                     |
| <b>Length</b>  | 66 ft  |  |              |             |               |              |                  |                           |                       |           |               |                          |  |                          |                  |                           |                           |  |                     |
| <b>Thickness</b>   | 48 mil ( <i>nominal</i> )  |  |              |             |               |              |                  |                           |                       |           |               |                          |  |                          |                  |                           |                           |  |                     |
| <b>Gross Coverage</b>  | 2 squares  |  |              |             |               |              |                  |                           |                       |           |               |                          |  |                          |                  |                           |                           |  |                     |
| <b>Weight</b>  | 50 lb ( <i>nominal</i> )   |  |              |             |               |              |                  |                           |                       |           |               |                          |  |                          |                  |                           |                           |  |                     |
|  <p><b>PS200<sup>HT</sup></b><br/><a href="#">PS200<sup>HT</sup> Data Sheet</a></p>   | <p>Premium SBS modified glass fiber reinforced, self-adhesive modified bituminous roofing underlayment manufactured with a specially engineered Hybrid Polymer System formulation that allows it to withstand high temperatures.</p> | <table border="1"> <tbody> <tr> <td><b>Width</b></td> <td>36 in</td> </tr> <tr> <td><b>Length</b></td> <td>66 ft 8 in</td> </tr> <tr> <td><b>Thickness</b></td> <td>60 mil (<i>nominal</i>)</td> </tr> <tr> <td><b>Gross Coverage</b></td> <td>2 squares</td> </tr> <tr> <td><b>Weight</b></td> <td>70 lb (<i>nominal</i>)</td> </tr> </tbody> </table>  | <b>Width</b> | 36 in       | <b>Length</b> | 66 ft 8 in   | <b>Thickness</b> | 60 mil ( <i>nominal</i> ) | <b>Gross Coverage</b> | 2 squares | <b>Weight</b> | 70 lb ( <i>nominal</i> ) | <p>Use under shingles, cedar shakes, tiles (foam and mechanical installation), and metal (excluding copper and zinc). Good for steep slope applications. As an ideal alternative, try NR600 Ultra.</p> | <p>Self-adhered</p>      |                  |                           |                           |  |                     |
| <b>Width</b>   | 36 in  |  |              |             |               |              |                  |                           |                       |           |               |                          |  |                          |                  |                           |                           |  |                     |
| <b>Length</b>  | 66 ft 8 in   |  |              |             |               |              |                  |                           |                       |           |               |                          |  |                          |                  |                           |                           |  |                     |
| <b>Thickness</b>   | 60 mil ( <i>nominal</i> )  |  |              |             |               |              |                  |                           |                       |           |               |                          |  |                          |                  |                           |                           |  |                     |
| <b>Gross Coverage</b>  | 2 squares  |  |              |             |               |              |                  |                           |                       |           |               |                          |  |                          |                  |                           |                           |  |                     |
| <b>Weight</b>  | 70 lb ( <i>nominal</i> )   |  |              |             |               |              |                  |                           |                       |           |               |                          |  |                          |                  |                           |                           |  |                     |
|  <p><b>PS200<sup>MU</sup></b><br/><a href="#">PS200<sup>MU</sup> Data Sheet</a></p>  | <p>Self-adhesive, glass fiber reinforced modified bituminous roofing underlayment with polyolefinic film on the upper side for good walkability. For use in high temperature environments.</p>                                       | <table border="1"> <tbody> <tr> <td><b>Width</b></td> <td>36 in</td> </tr> <tr> <td><b>Length</b></td> <td>66 ft 8 in</td> </tr> <tr> <td><b>Thickness</b></td> <td>48 mil (<i>nominal</i>)</td> </tr> <tr> <td><b>Gross Coverage</b></td> <td>2 squares</td> </tr> <tr> <td><b>Weight</b></td> <td>50 lb (<i>nominal</i>)</td> </tr> </tbody> </table>  | <b>Width</b> | 36 in       | <b>Length</b> | 66 ft 8 in   | <b>Thickness</b> | 48 mil ( <i>nominal</i> ) | <b>Gross Coverage</b> | 2 squares | <b>Weight</b> | 50 lb ( <i>nominal</i> ) | <p>Use under shingles, cedar shakes, mechanically attached tiles, metal (excluding copper and zinc). Good for steep slope applications. As an ideal alternative, try NR600 Ultra.</p>                  | <p>Self-adhered</p>      |                  |                           |                           |  |                     |
| <b>Width</b>   | 36 in  |  |              |             |               |              |                  |                           |                       |           |               |                          |  |                          |                  |                           |                           |  |                     |
| <b>Length</b>  | 66 ft 8 in   |  |              |             |               |              |                  |                           |                       |           |               |                          |  |                          |                  |                           |                           |  |                     |
| <b>Thickness</b>   | 48 mil ( <i>nominal</i> )  |  |              |             |               |              |                  |                           |                       |           |               |                          |  |                          |                  |                           |                           |  |                     |
| <b>Gross Coverage</b>  | 2 squares  |  |              |             |               |              |                  |                           |                       |           |               |                          |  |                          |                  |                           |                           |  |                     |
| <b>Weight</b>  | 50 lb ( <i>nominal</i> )   |  |              |             |               |              |                  |                           |                       |           |               |                          |  |                          |                  |                           |                           |  |                     |

## Product

## Description

## Product Data

## Usage

## Application



### NR600 Ultra

[NR600 Ultra  
Data Sheet](#)



SBS modified, non-reinforced, self-adhesive roofing underlayment surfaced with a highly durable polyester reinforcement, for use in high temperature environments. Self-adhesive compound on side lap ensures a bond between adjacent rolls for watertight laps.

**Width** 36 in  
**Length** 72 ft  
**Thickness** 60 mil (*nominal*)  
**Gross Coverage** 216 sq ft  
**Weight** 55 lb (*nominal*)

Use under foam-set and mechanically attached tiles, shingles, slate and metal. Good for steep and low slope applications.  
Ideal for use as an alternative to PS200<sup>HT</sup> and PS200<sup>MU</sup>.

Self-adhered



### FS500HT

[FS500HT  
Data Sheet](#)



SBS modified, non-reinforced, self-adhesive roofing underlayment comprising a rubberized asphaltic adhesive and surfaced with a high strength, multi-laminate polyolefinic film structure that is uniquely treated to provide enhanced skid resistance. The rubberized asphalt-based adhesive withstands high temperature conditions up to 250°F and self-seals around nails.

**Width** 36 in  
**Length** 66 ft 8 in  
**Thickness** 40 mil (*nominal*)  
**Gross Coverage** 200 sq ft  
**Weight** 55 lb (*nominal*)

Use under shingles, cedar shakes, mechanically attached tiles, and metal (excluding copper and zinc). Good for steep slope applications.

Self-adhered



### SA Shingle Starter

[Shingle Starter  
Data Sheet](#)









Fiberglass reinforced asphalt coated shingle starter roll surfaced with ceramic granules to protect against UV, weathering and physical damage.

**Width** 7.2 in  
**Length** 33 ft 4 in  
**Thickness** 56 mil (*nominal*)  
**Gross Coverage** 20 sq ft  
**Weight** 7.5 lb

Use under shingles and cedar shakes  
For steep slope applications.

Self-adhered

# Base Sheets

| Product  | Description   | Product Data   | Usage  | Application   |
|--|---|--|--|---|
|   | <p><b>Glass Base</b><br/> <a href="#">Glass Base Data Sheet</a></p>      | <p>Fiberglass reinforced sheet coated with superior quality weathering-grade asphalt.</p> <p><b>Width</b> 36 in<br/> <b>Length</b> 108 ft<br/> <b>Gross Coverage</b> 300 sq ft<br/> <b>Weight</b> 72 lb (<i>nominal</i>)</p>   | <p>Use as the initial or base ply in built-up and modified bitumen roof systems. Good for both low and steep slope applications.</p> | <p>Mechanical, hot-mopped or cold process adhesives</p> |
|   | <p><b>EasyNailBase</b><br/> <a href="#">EasyNailBase Data Sheet</a></p>  | <p>SBS modified bituminous membrane reinforced with fiberglass mat with polyolefinic film on the top surface and sand on the bottom side, for use as a mechanically attached base sheet in self-adhering roofing systems as well as torch, hot mop and cold applied systems.</p> <p><b>Width</b> 36 in<br/> <b>Length</b> 72 ft<br/> <b>Thickness</b> 50 mil (<i>nominal</i>)<br/> <b>Gross Coverage</b> 216 sq ft<br/> <b>Weight</b> 60 lb (<i>nominal</i>)</p> | <p>Good for both low and steep slope applications.</p>   | <p>Mechanical</p>                                       |
|  | <p><b>EasyBase</b><br/> <a href="#">EasyBase Data Sheet</a></p>        | <p>SBS modified, glass fiber reinforced, self-adhesive modified bituminous base sheet with a UV resistant polyolefinic film surface.</p> <p><b>Width</b> 36 in<br/> <b>Length</b> 72 ft<br/> <b>Thickness</b> 54 mil (<i>nominal</i>)<br/> <b>Gross Coverage</b> 216 sq ft<br/> <b>Weight</b> 70 lb (<i>nominal</i>)</p>   | <p>Good for both low and steep slope applications.</p>   | <p>Self-adhered</p>                                     |

| Product | Description | Product Data | Usage | Application |
|---------|-------------|--------------|-------|-------------|
|---------|-------------|--------------|-------|-------------|



**Valley Flash**

[Valley Flash Data Sheet](#)

Fiberglass reinforced sheet sandwiched between two layers of a heavy coating of superior quality bituminous resins modified with synthetic resins.



**Width** 36 in  
**Length** 33 ft 4 in  
**Coverage** 1 square  
**Weight** 33 lb (*nominal*)

Use as valley liner under shingles, cedar shakes.

Mechanical



**EasyTorch SA Base**

[EasyTorch SA Base](#)

Smooth surfaced, glass fiber reinforced, modified bituminous roofing membrane for use as a base sheet.





**Width** 36 in  
**Length** 72 ft  
**Thickness** 50 mil (*nominal*)  
**Gross Coverage** 216 sq ft  
**Weight** 70 lb (*nominal*)

Good for both low and steep slope applications.

Self-adhered






# Self-Adhesive SBS Modified Bitumen Membrane

| Product  | Description  | Product Data   | Usage  | Application                                       |
|--|--|--|--|---|
|  <p data-bbox="457 251 625 349"><b>EasyStick Plus</b><br/><a href="#">EasyStick Plus Data Sheet</a></p>  | <p data-bbox="688 251 987 341">SBS modified, granule surfaced, polyester reinforced self-adhesive modified bituminous cap sheet.</p> | <p data-bbox="1060 251 1375 406"><b>Width</b> 36 in<br/><b>Length</b> 36 ft<br/><b>Thickness</b> 120 mil (<i>nominal</i>)<br/><b>Gross Coverage</b> 108 sq ft<br/><b>Weight</b> 80 lb (<i>nominal</i>)</p> | <p data-bbox="1428 251 1732 308">Good for both low and steep slope applications.</p> | <p data-bbox="1816 251 1921 276">Self-adhered</p> |



# BUILDING ENVELOPE

UNWAVERING PROTECTION AGAINST MOISTURE AND VAPOR

| PRODUCT  | DESCRIPTION  | PRODUCT DATA   | USAGE  | APPLICATION         |
|--|--|--|--|---------------------|
|  <p><b>BG700</b><br/><a href="#">BG700 Data Sheet</a></p>  | <p>Self-adhering SBS modified bituminous membrane with a high strength cross laminated polyethylene film on the upper side and a removable silicone treated release liner on the bottom adhesive side.</p>   | <p><b>Width</b> 36 in<br/><b>Length</b> 66 ft 8 in<br/><b>Thickness</b> 60 mil (nominal)<br/><b>Gross Coverage</b> 200 sq ft<br/><b>Weight</b> 73 lb (nominal)</p> | <p>Multi-purpose membrane for vertical and horizontal waterproofing of foundation walls, tunnels, and earth shelters, as well as plaza decks, parking decks, balconies and terraces. Good for interior applications such as bathrooms and kitchens, and under siding, exterior plaster, wall flashing or anywhere it will be protected from prolonged exposure to ultraviolet light.</p> | <p>Self-Adhered</p> |
|  <p><b>25RA</b><br/><a href="#">25RA Data Sheet</a></p>   | <p>Premium-grade, specially formulated SBS self-adhered flashing membrane designed for use on vertical walls and other non-roofing applications</p>  | <p><b>Width</b> 4 in, 6 in, 9 in, 12 in, 18 in, 24 in, and 36 in widths<br/><b>Length</b> 75 ft<br/><b>Thickness</b> 25 mil (nominal)</p>                          | <p>Versatile flashing option that offers a moisture barrier around window and door openings, inside and outside corners of sheathing, electrical and plumbing penetrations, wall-to-wall tie-ins, deck-to-side wall transitions, behind stone and masonry walls, sheathing panel seams, foundation sill plates, behind stucco finishes, and many other applications.</p>                 | <p>Self-Adhered</p> |
|  <p><b>BarrierKraft 60</b><br/><a href="#">BarrierKraft 60 Data Sheet</a></p>  | <p>60 lb asphalt saturated Kraft paper with six times the water holdout capability required by code standards,</p>   | <p><b>Width</b> 40 in<br/><b>Length</b> 72 ft 8<br/><b>Thickness</b><br/><b>Gross Coverage</b> 240 sq ft<br/><b>Weight</b> 13 lb per roll</p>                      | <p>Use behind masonry, stone, stucco, fiber cement, wood, vinyl siding along with other claddings as both a primary and a secondary weather-resistive barrier.</p>   | <p>Mechanical</p>   |
|  <p><b>Butyl</b><br/><a href="#">Butyl Data Sheet</a></p>   | <p>High-performance, self-adhesive membrane designed for sealing windows, doors, and construction joints. Tailored for performance across high and low temperatures, down to 5°F, it integrates a robust butyl adhesive with engineered polyethylene film.</p> | <p><b>Width</b> 4 in, 6 in, 9 in, 12 in<br/><b>Length</b> 75 ft<br/><b>Thickness</b> 18 mil</p>  | <p>Versatile flashing membrane that offers a moisture barrier around window and door openings, inside and outside corners of sheathing, electrical and plumbing penetrations, wall-to-wall tie-ins, deck-to-side wall transitions, behind stone and masonry walls, sheathing panel seams, foundation sill plates, behind stucco finishes, and many other applications.</p>               | <p>Self-Adhered</p> |

**Tarco**<sup>®</sup>

One Information Way, Suite 225 ♦ Little Rock, AR 72202  
Voice: 501-945-4506 ♦ 800-365-4506 ♦ Fax: 501-945-7718 ♦ [www.tarcoroofing.com](http://www.tarcoroofing.com)

**LeakBARRIER**<sup>®</sup>